



Catalogue

CAD/CAM PRODUCTS

Valid from
March 2023

Contents

1

BEGO Security

- 5 BEGO Security Basic

2

Crown and Bridge Prosthetics

- 7 BEGO Zirkon ST / BEGO Zirkon ST Multi
- 8 BEGO Zirkon LT
- 10 VITA* YZ ST^{color}/ VITA YZ ST^{multicolor}
- 11 VITA* YZ XT^{color}/ VITA YZ XT^{multicolor}
- 12 KATANA* Zirconia YML
- 13 KATANA* Zirconia UTML
- 14 IPS e.max* CAD
- 15 VarseoSmile Crown^{plus}
- 16 BEGO PMMA Multicolor
- 18 Wirobond® C+
- 19 Wirobond® M+
- 20 BeCe® Cast
- 21 CAD/Cast®

3

CAD/CAM Implant Prosthetics

- 23 Individual Healing Posts
- 24 Individual Abutments
- 28 Occlusally Screw-Retained Bridges
- 30 Secondary Bar Structures
- 31 Bar Constructions
- 32 Bar Shapes

4

Partial Dentures

- 36 WIRONIUM® RP Partial Denture Frameworks
- 37 WIRONIUM® RP Hybrid Partial Denture Frameworks with telescopes

5

CAD/CAM Double Crowns

- 40 CAD/CAM Double Crowns
- 41 Secondary Structures from Hybrid Production

6

Splints

- 44 BEGO PMMA Splint E
- 45 BEGO PMMA Splint

7

Models

- 47 Model Production

8

Orthodontic Appliances

- 49 Orthodontic Appliances

9

Service

- 52 Order Options
- 53 BEGO CAD/CAM Tracking App
- 54 BEGO Further Education
- 55 General Information

Detailed product information:



1

BEGO Security Basic



Free.
Quick.
Extra long.

BEGO Security Basic

The free guarantee service

BEGO Security Basic

| Type of restoration | Material | | Duration | Service |
|---|-------------------|--|----------|---|
| "CAD/CAM Crowns and Bridges" module | | | | |
| Crowns and bridges | Metal | Applies for CAD/CAM-produced crown and bridge frames made by BEGO | 30 years | Free product replacement |
| | Ceramic | | 5 years | Free product replacement |
| "CAD/CAM Implant Prosthetics" module | | | | |
| Abutments | Metal | Applies for one-piece abutments made of BEGO Titan Grade 5 as well as Wirobond® MI+ and M+ | Lifetime | Free abutment replacement, poss. coverage of costs in case of screw fracture up to €1,200.00, poss. material costs of implant |
| | Zirconium dioxide | Applies for CAD/CAM-produced customized implant prosthetics made by BEGO | 5 years | Free abutment replacement, poss. coverage of costs in case of screw fracture up to €1,200.00, poss. material costs of implant |
| Bars | Metal | Applies for bars made of BEGO Titan Grade 5 as well as Wirobond® MI+ and M+ | Lifetime | Free abutment replacement, poss. coverage of costs in case of screw fracture up to €1,200.00, poss. material costs of implant |
| Bridges | Metal | Applies for CAD/CAM-produced customized screw-retainable bridges | Lifetime | Free abutment replacement, poss. coverage of costs in case of screw fracture up to €1,200.00, poss. material costs of implant |
| "CAD/CAM Partial Denture" module | | | | |
| Partial denture frameworks | Metal | Applies to CAD/CAM-produced partial denture frameworks WIRONIUM® RP made by BEGO | 5 years | Free product replacement |

Please do not hesitate to contact us in case of any questions concerning the process and/or our free BEGO Security Basic solutions.

For further questions concerning BEGO Security Basic

Thomas Mantwill Tel. +49 421 2028-284
E-mail mantwill@bego.com



Do you know BEGO Security Plus?

More information:



Detailed product information:



NEW!
Improved
recipe!



BEGO Zirkon ST / BEGO Zirkon ST Multi

Super translucent zirconium dioxide for large restorations

- Ultimate strength meets outstanding translucency
- Multicolor for outstanding prosthetics
- Shade match to the VITA* classical A-D shade ring thanks to pre-coloured material
- 16 VITA classical A-D shades
- Monochrome for full and partial veneers
- Multicolor for Micro Cut Back and monolithic restorations
- Bridge frames with up to 14 units and up to two adjacent pontics
- Implantat prosthetic abutments, monolithic abutment crowns and bridges

Product details

Chemical composition

| | |
|--|--------|
| Zirconium dioxide (ZrO ₂) | 87–94% |
| Hafnium oxide (HfO ₂) | 1–3% |
| Yttrium oxide (Y ₂ O ₃) | 5–9% |
| Other oxides and pigments | 0–1% |

Technical specifications

| | |
|----------------------------------|---------------------------------------|
| 3-point bending strength | 1,200 MPa |
| Coefficient of thermal expansion | 10,3 10 ⁻⁶ K ⁻¹ |
| Translucency | 46% |
| Sinter density | 6.05 g/cm ³ |
| Hardness | 13 HV1 |
| E-module | 210 GPa |

Indications

| |
|---|
| Fully anatomical crowns and bridges with up to 14 units and up to two pontics |
| Crowns and bridge frames for partially and fully veneered solutions with up to 14 units and up to two pontics |
| Dentin core crowns and bridges according to Josef Schwaiger (Patent: EP2363094B1 /DE102010002484B4) |
| CadAbut Duo (Two-piece abutments) |
| Telescopic primary crowns |

* This symbol is a commercial designation/registered trademark of a company which is not part of the BEGO company group. Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.

2

Crown and Bridge Prosthetics

BEGO Zirkon ST / BEGO Zirkon ST Multi

BEGO Zirkon LT

VITA* YZ ST^{color} / VITA YZ ST^{Multicolor}

VITA* YZ XT^{color} / VITA YZ XT^{Multicolor}

KATANA* Zirkonia YML

KATANA* Zirkonia UTML

IPS e.max* CAD

VarseoSmile Crown^{plus}

BEGO PMMA Multicolor

Wirobond® C+

Wirobond® M+

BeCe® Cast

CAD/Cast®



BEGO Zirkon LT

Translucent zirconium dioxide for ceramic frames

- High level of shade fidelity thanks to the BEGO shade concept consisting of a total of five shades
- Consistent shade accuracy and reproducibility thanks to precolored blanks
- All-ceramic zirconium dioxide frame material for ceramic veneering

Technical data

Chemical composition

| | |
|---|-------------------|
| ZrO ₂ + HfO ₂ + Y ₂ O ₃ | ≥ 99.5% by weight |
| Yttrium oxide (Y ₂ O ₃) | 5.2% by weight |
| Aluminum oxide (Al ₂ O ₃) | 0.25% by weight |
| Other oxides | ≤ 0.5% by weight |

Physical material data

| | |
|---|---------------------------------------|
| Density | 6.08 g/cm ³ |
| Biaxial strength | > 1,100 MPa |
| Vickers hardness (HV 1) | 1,250 MPa |
| Translucency | 35% |
| Coefficient of thermal expansion (RT – 600°C) | 11.2 10 ⁻⁶ K ⁻¹ |

Shade overview BEGO Zirkon LT01–LT05



Correspondence of BEGO Zirkon LT01–LT05 to VITA* classical shade system

| A1 | A2 | A3 | A3,5 | A4 | B1 | B2 | B3 | B4 | C1 | C2 | C3 | C4 | D2 | D3 | D4 |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| LT01 | LT02 | LT04 | LT03 | LT03 | LT01 | LT02 | LT04 | LT03 | LT01 | LT05 | LT05 | LT03 | LT05 | LT05 | LT02 |

Product details

Indications

Frames for partially and fully veneered solutions with up to 16 units and up to two pontics
Two-piece abutments

Extra

Telescopic primary crowns





VITA* YZ ST color / VITA YZ ST multicolor

The zirconium dioxide from the inventor of tooth shades, super translucent with best fidelity to the shade ring for all indications

- Latest generation multicolor with original VITA tooth shades
- Super translucent mono type with consistent highest flexural strength in all layers
- Pigmented incisal edge for natural dental aesthetics
- 4 layer multicolor with flowing layer transition
- Original 16 VITA classical A-D shades for VITA YZ ST color
- Original 9 VITA classical A-D shades for VITA YZ ST multicolor
- Multicolour for monolithic restorations and microveneering
- Monochrome for full and partial veneers
- Bridge frames with up to 14 units and up to two adjacent pontics
- Implantat prosthetic abutments, monolithic abutment crowns and bridges

Product details

Chemical composition

| | |
|--|--------|
| Zirconium dioxide (ZrO ₂) | 88–93% |
| Hafnium oxide (HfO ₂) | 1–3% |
| Yttrium oxide (Y ₂ O ₃) | 6–8% |
| Other oxides and pigments | 0–1% |

Technical specifications

| | |
|----------------------------------|---|
| 3-point bending strength | 1,200 MPa |
| Coefficient of thermal expansion | 10.3 10 ⁻⁶ / K ⁻¹ |
| Translucency | 46% |
| Sinter Density | 6.05 g/cm ³ |
| Hardness | 13 HV1 |
| E-module | 210 GPa |

Indications

| |
|---|
| Fully anatomical crowns and bridges with up to 14 units and up to two pontics |
| Crowns and bridge frames for partially and fully veneered solutions with up to 14 units and up to two pontics |
| Dentin core crowns and bridges according to Josef Schwaiger (Patent: EP2363094B1 /DE102010002484B4) |
| CadAbut Duo (Two-piece abutments) |
| Telescopic primary crowns |

* This symbol is a commercial designation/registered trademark of a company which is not part of the BEGO company group. Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.



VITA* YZ XT color / VITA YZ XT multicolor

The zirconium dioxide from the inventor of tooth shades, extra translucent with best fidelity to the shade ring for aesthetics restoration in the anterior region

- Latest generation multicolor with original VITA tooth shades
- Extra translucent mono type with consistent high flexural strength in all layers
- Pigmented incisal edge for natural dental aesthetics
- 4 layer multicolor with flowing layer transition
- Original 7 VITA classical A-D shades for VITA YZ XT multicolor
- Original 16 VITA classical A-D shades for VITA YZ XT color
- Multicolour for monolithic restorations and microveneering
- Monochrome for full and partial veneers
- Bridge frames with up to 3 units with one pontic

Product details

Chemical composition

| | |
|--|--------|
| Zirconium dioxide (ZrO ₂) | 86–91% |
| Hafnium oxide (HfO ₂) | 1–3% |
| Yttrium oxide (Y ₂ O ₃) | 8–10% |
| Other oxides and pigments | 0–1% |

Technical specifications

| | |
|----------------------------------|---|
| 3-point bending strength | > 600 MPa |
| Coefficient of thermal expansion | 10.0 10 ⁻⁶ / K ⁻¹ |
| Translucency | 50% |
| Sinter Density | 6.03 g/cm ³ |
| Hardness | 13 HV1 |
| E-module | 210 GPa |

Indications

| |
|--|
| Fully anatomical crowns and bridges with up to 14 units and up to two pontics |
| Fully anatomical crowns and bridges with up to 3 units and up to one pontics in the anterior region |
| Dentin core crowns and bridges according to Josef Schwaiger (Patent: EP2363094B1 /DE102010002484B4) |
| Inlays, onlays, partial crowns and veneers |

* This symbol is a commercial designation/registered trademark of a company which is not part of the BEGO company group. Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.



KATANA* Zirconia YML

The functional and aesthetic flagship of the Katana series with outstanding dental aesthetics and universal applicability

- Latest generation of type-layer zirconia with patented raw material technology
- Consistently highest flexural strength in the dentin and transfer area
- Optimum translucency with pigmented incisal layer for natural dental aesthetics
- 4 layer multicolor with flowing layer transition
- Available in 13 VITA* classical shades A-D
- Multicolour for monolithic restorations and microveneering
- Bridge frames with up to 14 units and up to two adjacent pontics
- Implantat prosthetic abutments, monolithic abutment crowns and bridges

Product details

Chemical composition

| | |
|---|---------|
| Zirconium dioxide (ZrO ₂) & Hafnium oxide (HfO ₂) | 87–95 % |
| Yttrium oxide (Y ₂ O ₃) | 5–10 % |
| Other oxides and pigments | 0–2 % |

Technical specifications

| | |
|----------------------------------|---------------------------------------|
| 3-point bending strength | 750–1,100 MPa |
| Coefficient of thermal expansion | 10.1 10 ⁻⁶ K ⁻¹ |
| Translucency | 45–49 % |
| Hardness | 1,255 HV10 |
| E-module | 214–217 Gpa |

Indications

| |
|---|
| Fully anatomical crowns and bridges with up to 14 units and up to two pontics |
| Crowns and bridge frames for partially and fully veneered solutions with up to 14 units and up to two pontics |
| CadAbut Duo (Two-piece abutments) |
| Dentin core crowns and bridges according to Josef Schwaiger (Patent: EP2363094B1 /DE102010002484B4) |

* This symbol is a commercial designation/registered trademark of a company which is not part of the BEGO company group. Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.



KATANA* Zirconia UTML

Ultra translucent zirconium dioxide with color gradation for natural aesthetics in the anterior region

- Ideal for restorations in the anterior region
- Above-average translucency for natural aesthetics
- 4 layer multicolor with flowing layer transition
- Available in 16 VITA* classical shades A-D
- Multicolour for monolithic restorations and microveneering
- Anterior bridge frames up to 3 units with one pontic

Product details

Chemical composition

| | |
|---|--------|
| Zirconium dioxide (ZrO ₂) & Hafnium oxide (HfO ₂) | 87–92% |
| Yttrium oxide (Y ₂ O ₃) | 8–11% |
| Other oxides and pigments | 0–2 % |

Technical specifications

| | |
|----------------------------------|--|
| 3-point bending strength | 557 MPa |
| Coefficient of thermal expansion | 9.7 10 ⁻⁶ / K ⁻¹ |
| Translucency | 43% |
| Hardness | 1,280 HV10 |
| E-module | 214–217 Gpa |

Indications

| |
|---|
| Inlays, onlays, partial crowns and veneers |
| Fully anatomical crowns and bridges with up to 3 units and up to one pontics in the anterior region |
| Crowns and bridge frames for partially veneered solutions with up to 3 units and up to one pontics in the anterior region |

* This symbol is a commercial designation/registered trademark of a company which is not part of the BEGO company group. Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.



IPS e.max* CAD

Lithium disilicate for restorations with natural aesthetics and strength

- High-strength lithium disilicate glass ceramic with an end strength 360 MPa
- Three degrees of translucency with up to 16 shades for highly aesthetic results
- Crystallization and glaze firing in one step – efficient and cost-effective at the same time
- Excellent aesthetics with optional individualization
- Years of clinical experience and millions of restorations placed
- **Please note:** The color of the precrystallized MO blanks is different from that of the HT and LT blanks. This is normal and has no influence on the final result



Detailed information and the instructions for use can be found at:
<http://www.ivoclarvivadent.com/en/download-center/>

Product details

Chemical composition

| | |
|-------------------|-------------|
| SiO ₂ | 57.0–80.0 % |
| Li ₂ O | 11.0–19.0 % |
| K ₂ O | 0.0–13.0 % |
| Other oxides | 0–8 % |

Physical material data

| | |
|--|--|
| Coefficient of expansion (100–400°C) | 10.15 ± 0.4 10 ⁻⁶ K ⁻¹ |
| Coefficient of thermal expansion (100–500°C) | 10.45 ± 0.4 10 ⁻⁶ K ⁻¹ |
| Flexural strength (biaxial) | ≥ 360 MPa |
| Density | 2.5 ± 0.1 g/cm ³ |

Indications

| |
|--|
| Single crowns (delivered in blue, precrystallized state) |
| Partial crowns, inlays, onlays, and veneers (delivered in blue, precrystallized state) |
| Three-unit bridges up to second premolar as terminal abutment (delivered in blue, precrystallized state) |
| Two-piece abutments for BEGO Semados® implants |

* This symbol is a commercial designation/registered trademark of a company which is not part of the BEGO company group.
 Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.



VarseoSmile Crown^{plus}

The tooth-colored, ceramic filled hybrid material for 3D printing of permanent single crowns, inlays, onlays and veneers

- Easy to grind and polish by using standard tools
- Seven shades according to the proven VITA* classical shades: A1, A2, A3, B1, B3, C2, D3, BEGO Bleach BL
- Individualization of the objects is possible with composite stains
- Fluorescence of the printed objects resembles that of the natural tooth
- Antagonist-friendly material with mechanical buffering effect – ideal for implant-supported crowns
- Extensive scientific studies by renowned universities and institutes confirm the excellent features of the restorations made of VarseoSmile Crown^{plus}
- Excellent aesthetics thanks to a balanced ratio of opacity and translucency
- Low tendency to age and discolor thanks to very low water absorption
- Minimized formation of secondary caries thanks to a high adhesive bond with luting composites

Product details

Technical specifications

| | |
|-------------------|----------------------------|
| Color | A1, A2, A3, B1, B3, C2, D3 |
| Layer thickness | 50 µm |
| Flexural strength | 116–150 MPa** |
| Flexural modulus | 4,090 MPa |
| Water solubility | < 1 µg/mm ³ |
| Water sorption | < 12 µg/mm ³ |

Indications

| |
|--|
| Single crowns, inlays, onlays, and veneers |
|--|

* This symbol is a commercial designation/registered trademark of a company which is not part of the BEGO company group.

** See survey „Auswirkungen zusätzlicher UV-Lichthärtungsprozesse“ under www.bego.com

Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.



BEGO PMMA Multicolor

High-performance PMMA with color gradient for temporary restorations

- Production of aesthetically pleasing and cost-effective semi-permanent restorations
- The multi-color design has been adapted to the color gradient of natural teeth
- Very good fracture resistance and flexural strength
- Abrasion- and color-stable
- Can be veneered with commercially available veneering plastics
- Resistant to deposit build-ups and easy to clean
- Exceptional biocompatibility; suitable for allergy sufferers

Technical data

Chemical composition

| | |
|--------------------------------------|--------------------------|
| Acrylic polymer methacrylate (PMMA) | ≥ 99.9 % |
| The concentration of all pigments is | < 0.1 % (color pigments) |

Material data

| | |
|-------------------|--------------------------|
| Elastic modulus | 3,370 MPa |
| Tensile strength | 76.3 MPa |
| Stress at break | 70.3 MPa |
| Flexural strength | 120 MPa |
| Water absorption | 19.36 µg/mm ³ |
| Solubility | < 1 µg/mm ³ |

Shade overview BEGO PMMA Multicolor M01–M03



Correspondence of BEGO PMMA Multicolor M01–M03 to VITA* classical shade system

| A1 | A2 | A3 | A3,5 | A4 | B1 | B2 | B3 | B4 | C1 | C2 | C3 | C4 | D2 | D3 | D4 |
|-----|-----|-----|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| M01 | M01 | M02 | M02 | M02 | M01 | M01 | M02 | M02 | M03 | M03 | M03 | M02 | M01 | M02 | M02 |

Product details

Indications

- Crowns and bridges with pontics up to a width of 15 mm
- Two-piece abutments
- Two-piece individual healing posts



* This symbol is a commercial designation/registered trademark of a company which is not part of the BEGO company group. Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.



Wirobond® C+

Cobalt-chrome restorations produced with the SLM method

- Optimal material characteristics of a cobalt-chrome alloy
- The SLM (Selective Laser Melting) procedure guarantees a homogeneous and extremely dense structure for secure ceramic veneering
- Controlled manufacturing process – for stress-free frames and outstanding accuracy of fit
- Nickel- and beryllium-free – no cytotoxic or allergic potential

Product details

Chemical composition

Co 63.9 % · Cr 24.7 % · W 5.4 % · Mo 5.0 % · Si

Technical properties

| | |
|--|---------------------------------------|
| Type (according to ISO 22674) | 5 |
| Density | 8.6 g/cm ³ |
| 0.2 % elongation limit (R _{p0,2}) | 1,090 MPa |
| Tensile strength (R _m) | 1,315 MPa |
| Modulus of elasticity | 215 GPa |
| Solidus temperature; liquidus temperature | 1,380;1,420°C |
| Coefficient of thermal expansion (RT–500 °C) | 14.3 10 ⁻⁶ K ⁻¹ |
| Coefficient of thermal expansion (RT–600 °C) | 14.5 10 ⁻⁶ K ⁻¹ |

Indications

| |
|--|
| Frames for partially and fully veneered solutions with up to 16 units and up to four pontics |
| Fully anatomical crowns and bridges with up to 16 units and up to four pontics |
| Two-piece abutments |
| C&B tertiary frame |
| Retention per segment |



Wirobond® M+

Milled cobalt-chrome restorations

- The simultaneous 5-axis milling guarantees optimal precision of fit – with every unit
- Each milling disc is re-densified – for a dense, high-lustre finish and more than 99% freedom from porosity
- High strength in all span sizes – therefore a very wide range of indications
- Can be veneered with commercially available ceramics (with a corresponding coefficient of thermal expansion)
- Corrosion-resistant and biocompatible
- Nickel- and beryllium-free

Product details

Chemical composition

Co 63.8 % · Cr 24.8 % · W 5.3 % · Mo 5.1 % · Si 1.0 %

Alloy characteristics

| | |
|--|---------------------------------------|
| Type (according to ISO 22674) | 4 |
| Density | 8.6 g/cm ³ |
| Modulus of elasticity | 235 GPa |
| 0.2 % elongation limit (R _{p0,2}) | 415 MPa |
| Tensile strength (R _m) | 965 MPa |
| Hardness (HV 10) | 290 |
| Coefficient of thermal expansion (RT - 500 °C) | 14.4 10 ⁻⁶ K ⁻¹ |
| Coefficient of thermal expansion (RT - 600 °C) | 14.6 10 ⁻⁶ K ⁻¹ |

Indications

| |
|--|
| Frames for partially and fully veneered solutions with up to 16 units and up to four pontics |
| Fully anatomical crowns and bridges with up to 16 units and up to four pontics |
| One-piece abutments, bars, and occlusally screw-retained bridges |

Extras

| |
|--------------------------------------|
| Abutments with fully anatomical form |
|--------------------------------------|



BeCe® Cast

Milled frames out of plastic for casting in the laboratory

- Simple and fast CAD modeling
- Use of residue-free combustible and dimensionally stable plastic – ideal for investing and casting in your laboratory
- Filigree occlusal surfaces and the highest precision due to High Speed Cutting (HSC)
- Smooth surfaces for best casting results

Product details

Indications

Individual copings and bridges from plastic which burns out completely (only available for BEGO precious alloys customers)



CAD/Cast®

Cast restorations based on CAD data

- Diverse range of precious-metal alloys
- Not necessary to store cost-intensive precious-metal alloys in the laboratory
- The cost-effective combination of digital design and conventional casting technique
- Only actual consumption calculated – particularly cost-effective

Product details

CAD/Cast® alloys

| | | |
|------------------|-------------------|------------------|
| AuroLloyd® KF | BegoStar® | PlatinLloyd® 100 |
| BEGO EcoLine AU | BegoStar® LFC | PlatinLloyd® M |
| BEGO EcoLine K | Bio PlatinLloyd® | Pontonorm |
| BEGO EcoLine LFC | Bio PontoStar® | PontoLloyd® G |
| BegoPal® 300 | Bio PontoStar® XL | PontoLloyd® P |
| BegoPal® S | ECO d'OR | |


Indications

Frames for partially and fully veneered solutions with up to seven units

Fully anatomical crowns and bridges with up to 7 units and up to four pontics

Selected BEGO precious alloys

At the respective day rate; please request the latest price (Tel. +49 421 2028-220)

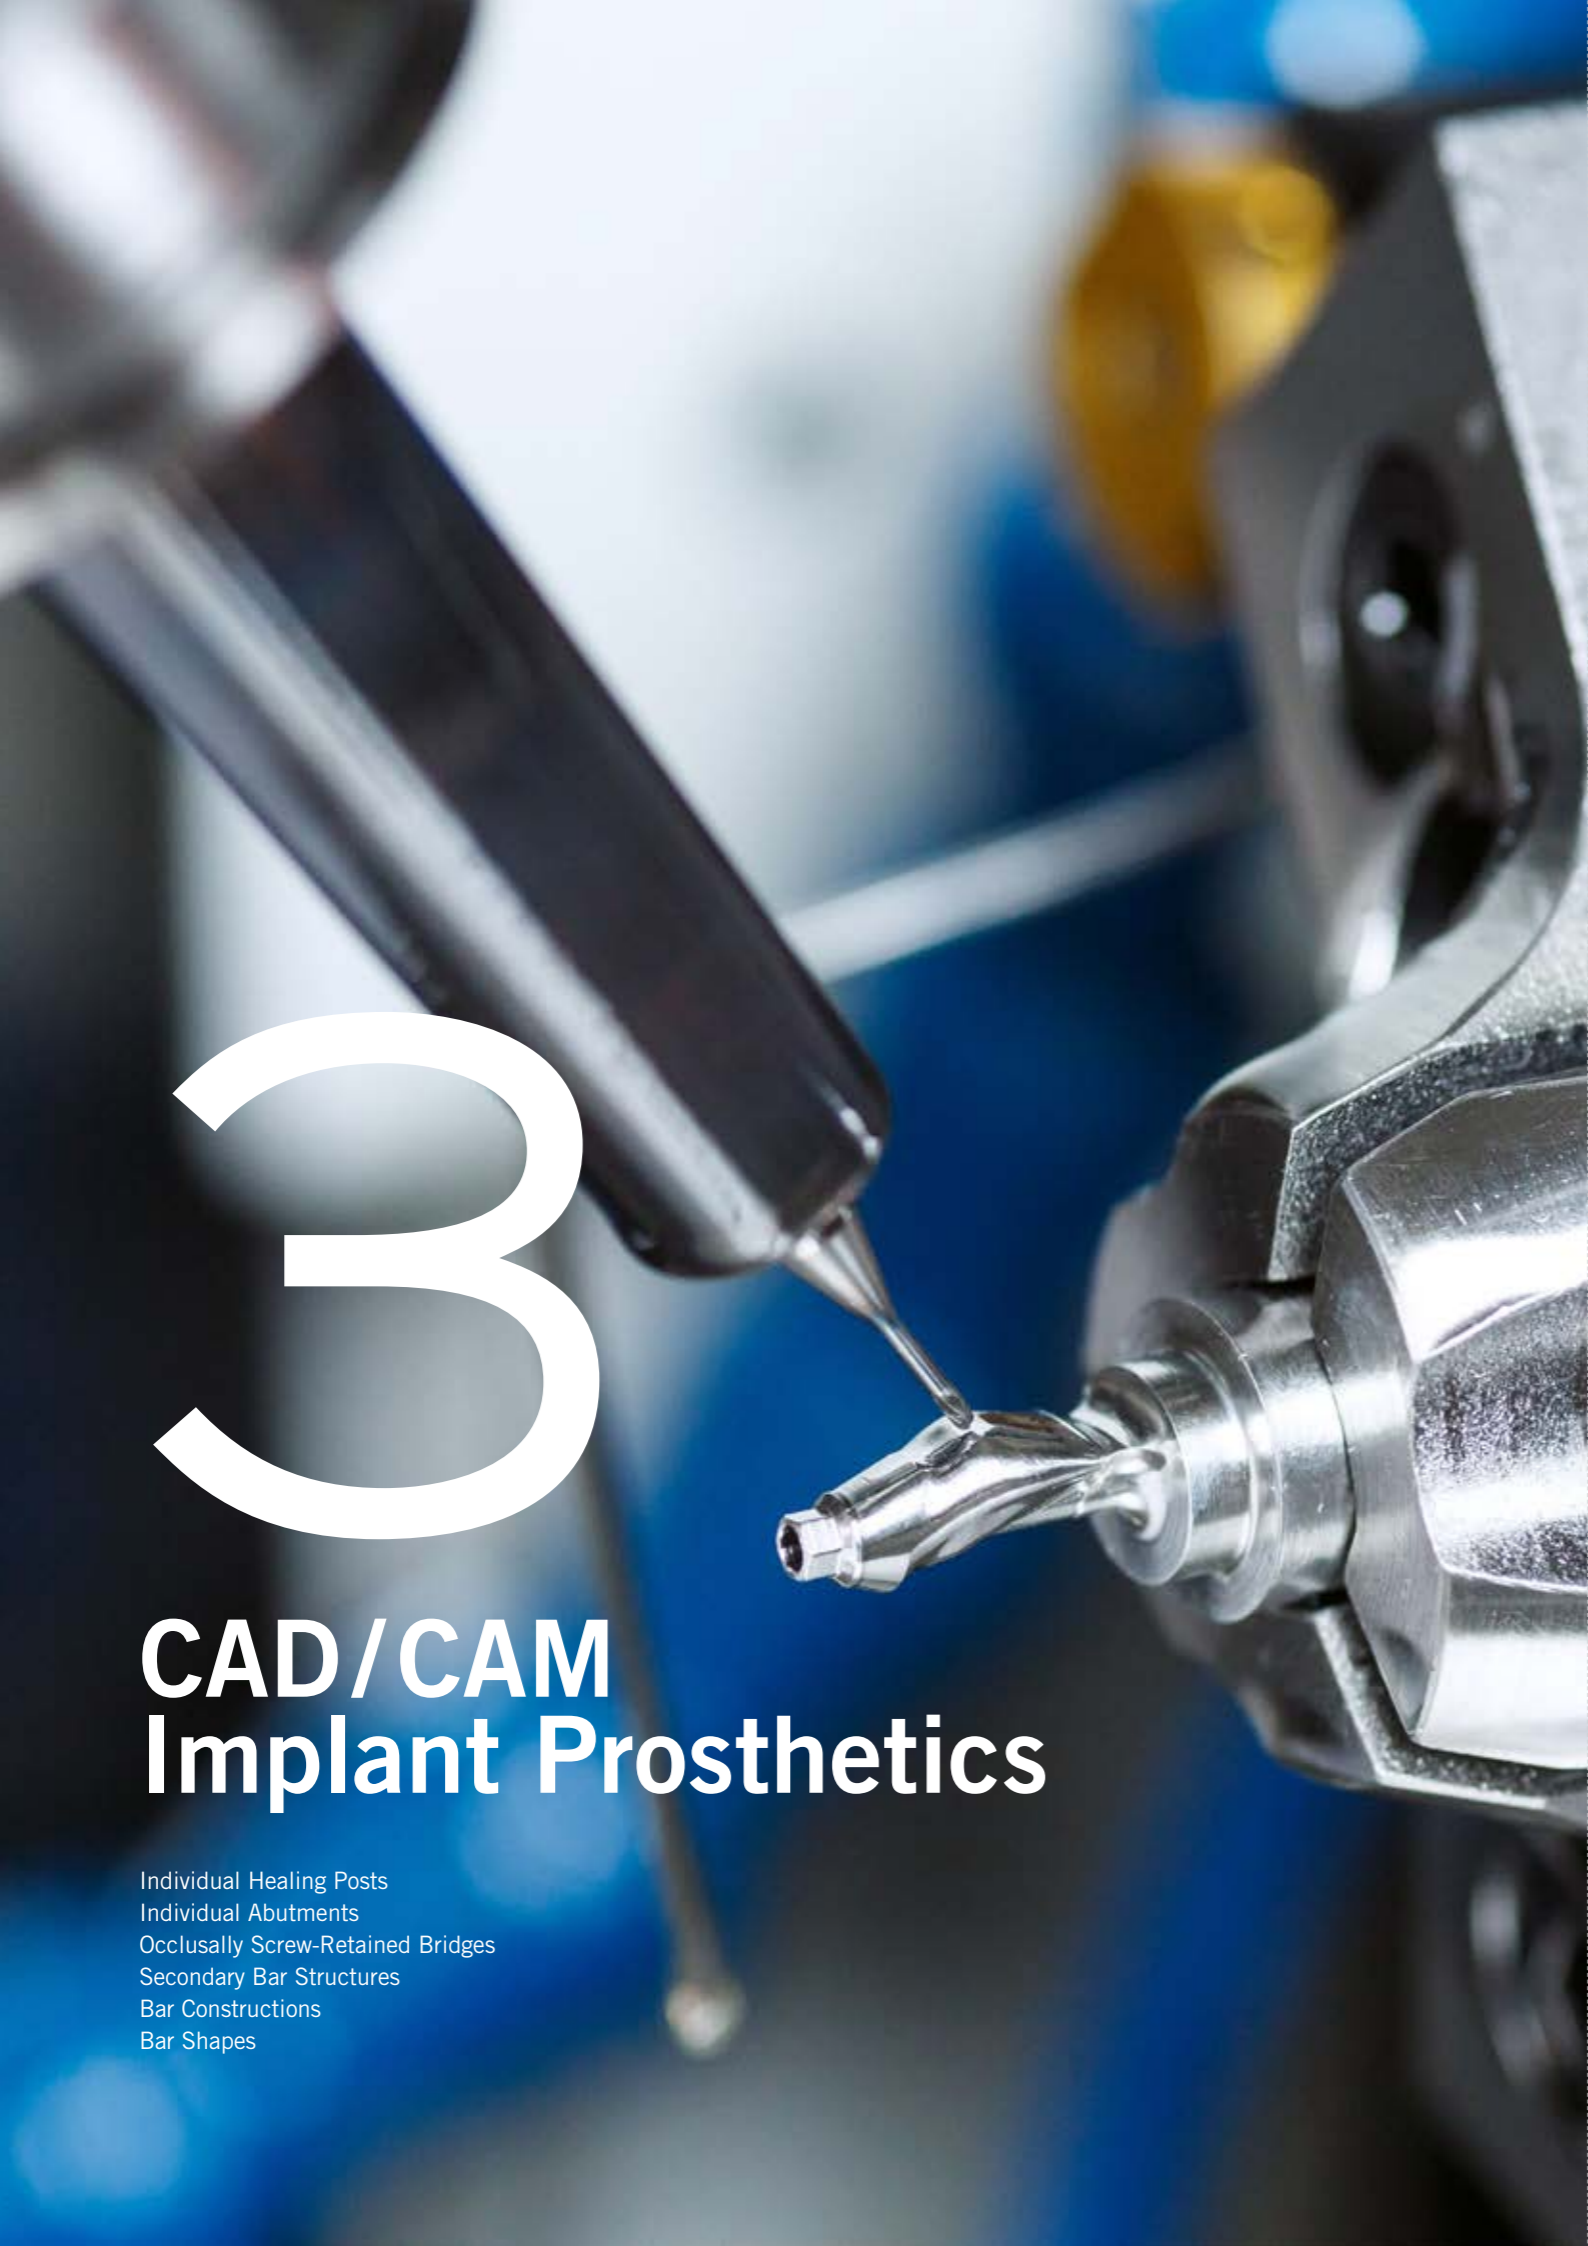

CAD/CAM Implant Prosthetics

- Individual Healing Posts
- Individual Abutments
- Occlusally Screw-Retained Bridges
- Secondary Bar Structures
- Bar Constructions
- Bar Shapes

Detailed product information:



Individual Healing Posts

Patient-specific soft tissue management for maximum aesthetics

- Optimal emergence profile for highly aesthetic anterior solutions
- Suitable for both one- and two-stage procedures
- Available in BEGO Titan Grade 5* (can be sterilized) or BEGO PMMA Multicolor* together with a titanium adhesive abutment and a prosthesis screw

BEGO CADAbut Full – one-piece individual healing posts including prosthesis screw**

Material

BEGO Titan Grade 5



BEGO CADAbut Duo – two-piece individual healing posts (with additional titanium adhesive abutment)**

Material

BEGO PMMA Multicolor
Available in three shades (M01, M02, M03)



* More information can be found in chapter "Crown and Bridge Prosthetics" starting on page 7.

** For availability see www.bego.com

Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.



Individual Abutments

One- and two-piece abutments for various implant systems

- Reliable and durable restorations thanks to excellent stability and high strength
- Dynamic fatigue testing as defined by ISO 14801
- Range of indications from screw-retained single-tooth restorations to cement-retained crowns and bridge solutions
- Individual, patient-specific emergence profile ensures optimal soft tissue management
- An optional angled screw channel can be individually selected for 0°–20° to the implant position – for an optimal occlusal exit of the screw channel in the anterior and posterior region
- Only certified biocompatible materials* – verified by external institutes

BEGO CADAbut Full – one-piece individual abutments including prosthesis screw**

| Material | Product designation |
|----------------------------------|--|
| Wirobond® MI+ | |
| | Angled screw channel 0°–20° |
| BEGO Titan Grade 5 | |
| | Angled screw channel 0°–20° |
| Extras | |
| Fully anatomical form | |
| Screwdriver for prosthetic screw | Angled screw channel DYNAMIC ABUTMENT*** screwdriver L24 Note: Angled screw channel DYNAMIC ABUTMENT is not compatible with BEGO PS CAD/CAM titanium base! |



* More information can be found in chapter "Crown and Bridge Prosthetics" starting on page 7.

** For availability see www.bego.com

Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.

BEGO CADAbut Duo – two-piece individual abutments (with additional titanium adhesive abutment)*

| Material** | Info |
|----------------------------------|--|
| BEGO Zirkon LT | Available in five shades (LT01–LT05) Note: for BEGO Semados® implants, the CADAbut Duo with titanium base PS CAD/CAM is also available with an up to 25° angled screw channel. Please note the appropriate required screwdriver! |
| BEGO Zirkon ST Multi | Available in 16 VITA*** classical shades Note: for BEGO Semados® implants, the CADAbut Duo with titanium base PS CAD/CAM is also available with an up to 25° angled screw channel. Please note the appropriate required screwdriver! |
| VITA YZ ST ^{color} | Available in 16 VITA classical shades A-D Note: for BEGO Semados® implants, the CADAbut Duo with titanium base PS CAD/CAM is also available with an up to 25° angled screw channel. Please note the appropriate required screwdriver! |
| VITA YZ ST ^{multicolor} | Available in 9 VITA classical shades A-D Note: for BEGO Semados® implants, the CADAbut Duo with titanium base PS CAD/CAM is also available with an up to 25° angled screw channel. Please note the appropriate required screwdriver! |
| KATANA*** Zirkonia YML | Available in 13 VITA classical shades A-D Note: for BEGO Semados® implants, the CADAbut Duo with titanium base PS CAD/CAM is also available with an up to 25° angled screw channel. Please note the appropriate required screwdriver! |
| IPS e.max*** CAD | <ul style="list-style-type: none"> • Delivered in blue, precrystallized state • LT available in the 16 VITA classical shades • MO available in five opaque shades <p>Please note: For BEGO Semados® implants SC/SCX/RS/RSX/RI with Platform Switch Design. Angled screw channels are not available for e.max CAD.</p> |
| Wirobond® C+ | Note: for BEGO Semados® implants, the CADAbut Duo with titanium base PS CAD/CAM is also available with an up to 25° angled screw channel. Please note the appropriate required screwdriver! |
| BEGO PMMA Multicolor | <ul style="list-style-type: none"> • Available in three shades (MO1, MO2, MO3) • For temporary use only <p>Note: for BEGO Semados® implants, the CADAbut Duo with titanium base PS CAD/CAM is also available with an up to 25° angled screw channel. Please note the appropriate required screwdriver!</p> |

Extras

| | |
|--|--|
| Screwdriver for angled screw channels up to 25° for BEGO Semados® CADAbut Duo restorations with PS CAD/CAM titanium base | BEGO Semados® screwdriver L24 for CADAbut Duo with BEGO Semados® PS CAD/CAM titanium base. Not compatible with DYNAMIC*** ABUTMENT screwdriver. |
|--|--|



* For availability see www.bego.com

** More information can be found in chapter "Crown and Bridge Prosthetics" starting on page 7.

*** The following symbols are commercial designations/registered trademarks of companies which, with the exception of BEGO Implant Systems (Semados®), are not part of the BEGO company group.

Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.



REALLY FLEXIBLE.



REALLY SIMPLE.



REALLY BEAUTIFUL.

EVERY CASE IS A CASE FOR BEGO

BEGO adhesive bases with angled screw channel

DID YOU KNOW?

Our BEGO adhesive bases offer you a large portfolio of treatment options for a diverse range of indications in the anterior and posterior region.

Time to Smile! Avoid unfavourable exit openings of the screw channels, especially in aesthetically demanding regions, and angle them up to 25°.

Curious?





Occlusally Screw-Retained Bridges

Screw-retained implant bridges made of zirconium dioxide or cobalt-chrome

- Wide range of indications such as anatomically reduced bridge frameworks for direct veneering, thimble bridges, or frameworks for screw-retained plastic prostheses
- Different materials* available (metal, PMMA or zirconia adhesive bridges)
- Screw connection allows removal under certain conditions for repair - thus simple repair possibility
- Optional angled screw channel from 0° to 20° to the implant position individually selectable – for an optimal occlusal exit of the screw channel in the anterior and posterior region
- Either at implant or abutment level – great flexibility

BEGO CADBase Implantat Niveau / Abutment Niveau – one-piece individual bridge constructions including prosthesis screw**

| Material | Product designation | Units |
|----------------------------------|---|-------------------|
| BEGO Titan Grade 5 | Occlusally screw-retained bridges / bridge frameworks | 2–4 5–7 ≥ 8 |
| | Angled screw channel 0°–20° | |
| | Pontic / bridge frames | |
| Wirobond® M+ | Occlusally screw-retained bridges/ bridge frameworks | 2–4 5–7 ≥ 8 |
| | Angled screw channel 0°–20° | |
| | Pontic / bridge frames | |
| Screwdriver for prosthetic screw | Angled screw channel DYNAMIC ABUTMENT*** screwdriver L24 Note: Angled screw channel DYNAMIC ABUTMENT is not compatible with BEGO PS CAD/CAM titanium base! | |



* More information can be found in chapter "Crown and Bridge Prosthetics" starting on page 7.
 ** For availability see www.bego.com
 *** The following symbols are commercial designations/registered trademarks of companies which, with the exception of BEGO Implant Systems (Semados®), are not part of the BEGO company group.
 Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.

BBEGO CADAbut Duo without rotation protection – two-piece individual bridge construction (with additional titanium adhesive abutment)*

| Material | Info | Product designation | Units | |
|----------------------------------|---|---|----------|-----------------|
| BEGO Zirkon LT | Bridge constructions for partial and full veneers with up to 16 units and up to two bridge elements. Available in five shades (LT01–LT05). | Occlusally screw-retained bridges / bridge frameworks | up to 16 | |
| | | Pontic / bridge frames | up to 2 | |
| BEGO Zirkon ST Multi | Fully anatomical crowns and bridges, bridge frameworks for partial and full veneering with up to 16 units and up to two pontics. Available in 16 VITA** classical shades. | Occlusally screw-retained bridges / bridge frameworks | up to 16 | |
| | | Pontic / bridge frames | up to 16 | |
| VITA YZ ST ^{color} | Bridge frames for partial and full veneers with up to 14 units and up to two pontics. 16 VITA classical A–D shades. | Occlusally screw-retained bridges / bridge frameworks | up to 14 | |
| | | Pontic / bridge frames | up to 2 | |
| | | | | Picture similar |
| VITA YZ ST ^{multicolor} | Fully anatomical crowns and bridges, bridge frames for partially and fully veneered solutions with up to 14 units and up to two pontics. 9 VITA classical A–D shades. | Occlusally screw-retained bridges / bridge frameworks | up to 14 | |
| | | Pontic / bridge frames | up to 2 | |
| | | | | Picture similar |
| KATANA** Zirconia YML | Fully anatomical crowns and bridges, bridge frames for partially and fully veneered solutions with up to 14 units and up to two pontics. 13 VITA classical A–D shades. | Occlusally screw-retained bridges / bridge frameworks | up to 16 | |
| | | Pontic / bridge frames | up to 2 | |
| | | | | Picture similar |
| BEGO PMMA Multicolor | Only for temporary bridge restorations with up to 16 units and one pontic. Available in three shades (M01, M02, M03). | Occlusally screw-retained bridges / bridge frameworks | up to 16 | |
| | | Pontic / bridge frames | up to 1 | |
| Wirobond® C+ | Bridge constructions for partial and full veneers with up to 16 units and up to four bridge elements. | Occlusally screw-retained bridges / bridge frameworks | up to 16 | |
| | | Pontic / bridge frames | up to 4 | |
| | Fully anatomical bridge construction with up to 16 units and up to four bridge elements. | Occlusally screw-retained bridges / bridge frameworks | up to 16 | |
| | | Pontic / bridge frames | up to 4 | |

Extras

| | |
|--|---|
| Screwdriver for angled screw channels up to 25° for BEGO Semados® CADAbut Duo restorations with PS CAD/CAM titanium base | BEGO Semados® screwdriver L24 for CADAbut Duo with BEGO Semados® PS CAD/CAM titanium base. Not compatible with DYNAMIC*** ABUTMENT screwdriver. |
|--|---|



* For availability see www.bego.com
 ** The following symbols are commercial designations/registered trademarks of companies which, with the exception of BEGO Implant Systems (Semados®), are not part of the BEGO company group.
 Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.



Secondary Bar Structures

Stress-free secondary bar construction made of cobalt chrome in SLM method

- Possibility of freely modeling the outer bar surfaces – choose between pin, hole, and bead retentions
- Stress-free fit thanks to SLM method, additional retaining elements (Ancora or Preci) ensure secure fit of prosthesis
- Supplied already sand-blasted – only minimal finishing required in the lab
- Time and cost savings

Secondary bar structures

Material

Wirobond® C+
incl. pin, hole, and/or bead retentions

Hybrid made of Wirobond® C+
incl. pin, hole, and/or bead retentions



Bar Constructions

Milled bars and bar abutments made of titanium or cobalt-chrome

- Exact fit thanks to highly accurate CAD/CAM production
- Stress-free position contributes to long-term success
- Shortened delivery time for unfinished bars
- Available in BEGO Titan Grade 5 or Wirobond® M+
- Biocompatibility examined by an independent institute and confirmed with a certificate
- **Please note:** “Unfinished” bars cannot be procured from the BEGO Scan and Design Center.

BEGO CADBase – bar abutments incl. prosthesis screws*

| Material | Units |
|-------------------------------|-------------------|
| BEGO Titan Grade 5 | 2-4 5-7 ≥ 8 |
| Angled screw channel 0° – 20° | |
| Wirobond® M+ | 2-4 5-7 ≥ 8 |
| Angled screw channel 0° – 20° | |




BEGO CADBar*

| Material |
|--------------------|
| BEGO Titan Grade 5 |
| Wirobond® M+ |



* For availability see www.bego.com
Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.

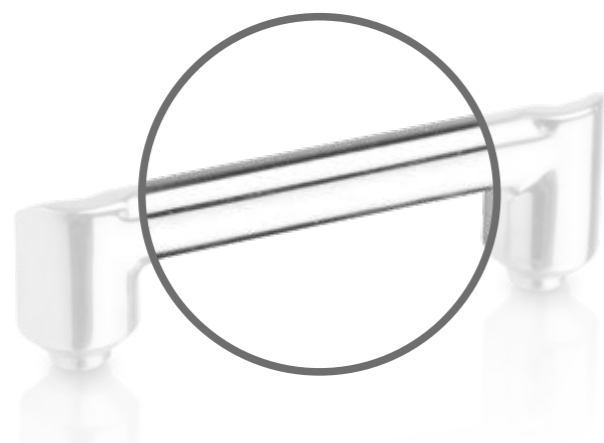

Bar Shapes

Bar joints, bar attachments, additional retaining elements

Bar joint*

Indication: Implant-gingiva-supported removable prosthesis on at least two implants (without extensions)

| | | |
|--------------------------|--|--|
| Round bar 1.8 mm | | |
| Horix* bar 1.8 mm | | |
| Dolder* bar joint 2.3 mm | | |
| Dolder bar joint 3.0 mm | | |

Bar attachments*

Indication: Implant-supported removable prosthesis on at least four implants (with extensions)

| | | |
|-----------------------------------|--|--|
| Dolder bar attachment 3.0 mm | | |
| Customized bar shapes/attachments | | |


* For availability see www.bego.com

** The following symbols are commercial designations/registered trademarks of companies which, with the exception of BEGO Implant Systems (Semados®), are not part of the BEGO company group.

Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.

Additional retaining elements

| Product designation | Available for |
|-------------------------------------|--|
| Rod attachment | <ul style="list-style-type: none"> Preci-Vertex* 1.8 mm Preci-Vertex* Crown Preci-Vertex* Bar |
| Tapped holes for retention elements | <ul style="list-style-type: none"> Zest Anchors* CEKA* attachment M2 CEKA attachment M3 CEKA attachment M2 |
| Borehole elements | 1.9–3.0 mm |
| Bar element | Horix bar element, 1.8 mm |

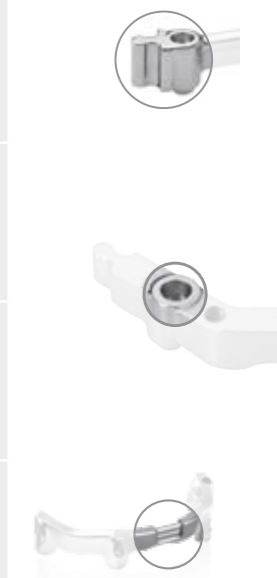

Retention elements

| | | |
|-----------------|--|--|
| Element | Dolder bar female part, palladium alloy | |
| Contents | Resilience rail Female part with retention for plastic | |
| Material | Palladium alloy | |
| | available from Ceka-Vertrieb Deutschland, Akazienstraße 7A, 30169 Hanover, Germany Tel. +49 511 8070041, www.cka-vertrieb.de | |

Female parts (Preci-Vertex rider/Preci-Horix* rider)

| | |
|--|--|
| Female parts, dia. 1.8 mm, yellow, 1 unit = 6 pieces, (REF 1802) | |
| Available from Ceka-Vertrieb Deutschland, Akazienstraße 7A, 30169 Hanover, Germany Tel. +49 511 8070041, www.cka-vertrieb.de | |

* This symbol is a commercial designation/registered trademark of a company which is not part of the BEGO company group. Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.



4

Partial Dentures

WIRONIUM® RP Partial Denture Frameworks
WIRONIUM® RP Hybrid Partial Denture Frameworks with telescopes



WIRONIUM® RP Partial Denture Frameworks

The perfect combination of CAD and CAM

- Precisely fitting SLM-made partial dentures for upper and lower jaw
- High ductility of the material enables activation of the clasps as with cast components
- Further development of the casting alloy WIRONIUM®, which has been tried and tested for decades
- Delivery in blasted or high gloss polished condition
- Pore-free partial denture frameworks through industrial production process

Product details

Chemical composition

Co 66.2 · Cr 28.2 · Mo 5.5 · N < 1

Alloy characteristics

| | |
|---|-----------------------|
| Density | 8.5 g/cm ³ |
| Modulus of elasticity | 235 GPa |
| 0.2 % elongation limit (R _{p0.2}) | 800 MPa |
| Tensile strength (R _m) | 1,300 MPa |
| Ductile yield (A ₅) | 13 % |
| Hardness (HV10) | 395 |

Indications: Clasp retained partial dentures for upper and lower jaw

- Partial denture framework blasted
- Partial denture framework polished



WIRONIUM® RP Hybrid Partial Denture Frameworks with telescopes

Save time and money with digital one-piece casting!

- Precision-fit partial dentures with telescoping connection
- Save time and costs for joining partial denture and outer telescopes
- Telescopes and conical crowns with 0°–6°
- Set the telescope friction via CAD design
- Supplied with slight underfitting to allow friction to be individually adjusted
- Hybrid production using SLM (Selektive Laser Melting) and milling
- Delivery in high gloss polished condition
- Pore-free partial denture frameworks through industrial production process

Product details

Chemical composition

Co 66.2 · Cr 28.2 · Mo 5.5 · N < 1

Alloy characteristics


| | |
|---|-----------------------|
| Density | 8.5 g/cm ³ |
| Modulus of elasticity | 235 GPa |
| 0.2 % elongation limit (R _{p0.2}) | 800 MPa |
| Tensile strength (R _m) | 1,300 MPa |
| Ductile yield (A ₅) | 13 % |
| Hardness (HV10) | 395 |

Indications: Model cast dentures and model cast reinforcements with double crowns for for upper and lower jaw

Note: Please note possible restrictions regarding the CAD software:
 exocad: supported
 3Shape: expected from version 2023
 Dentalwings: unsupported

Checklist for designing partial frameworks made of WIRONIUM® RP

Please ensure that you have taken the following points into account when designing your partial framework before sending your file to BEGO.

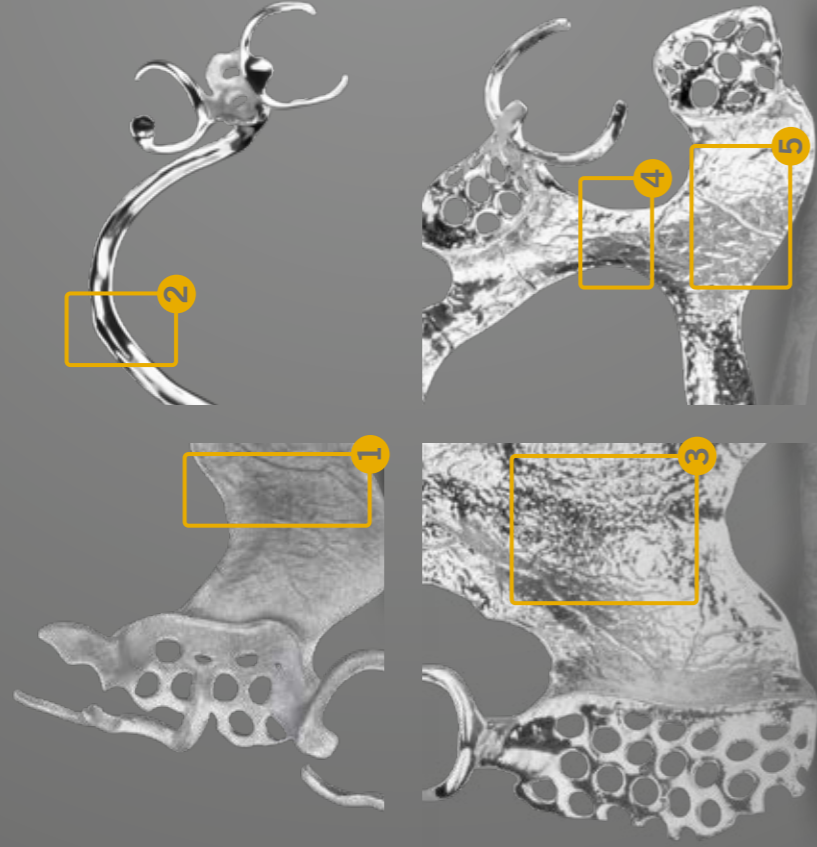

Special minimum thicknesses (see picture on the left):

- ❑ 1 Transversal bands 1.7 mm x 5.0 mm
(Total width min. 10 mm, tapering towards the edge to a maximum of 0.6 mm)
- ❑ 2 Sublingual bar profile 1.8 mm–2.0 mm x 4.0 mm–4.2 mm
- ❑ 3 Base plate thickness 0.6 mm
- ❑ 4 Skeletonized plate 0.6 mm x 5.0 mm
- ❑ 5 Medium or coarse grained surface recommended

General minimum thicknesses:

- ❑ Connector profile 1.2 mm–1.5 mm x 1.8 mm–2.0 mm
(connector thickness x connector width)
- ❑ Clasps profile 1.5 mm x 2.0 mm (clasp thickness x clasp width)
(Taper to the tip of the clasp to 1.2 mm–1.5 mm)

General parameters:

- ❑ Continuous and smooth interface between the components have been designed
- ❑ Retention pins were strengthened and firmly blended on the connection to the retentions
- ❑ Edges and uneven surfaces have been smoothed
- ❑ Support structures have not been set – these will be set by BEGO individually

Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.



CAD/CAM Double Crowns

CAD/CAM Double Crowns
Secondary Structures from Hybrid Production



CAD/CAM Double Crowns

Milled and /or SLM-produced telescopic and conical crowns

- Defined fit of primary and secondary crown
- Selection of different production methods
- Free-form design including different retentions and supporting elements by SLM production
- Time advantage thanks to one-step procedure
- Choice between one- and two-step procedure
- **Please note:** Double crowns cannot be procured from the BEGO Scan and Design Center.

Product details

Indications

- Telescopic prostheses and bridges
- Extension of existing prostheses

Wirobond® M+ CAD/CAM double crowns

- Primary crown
- Secondary crown
- Secondary attachment



Wirobond® C+ CAD/CAM double crowns

- Primary crown
- Secondary crown
- Secondary crown (hybrid)
- Secondary attachment
- Attachment mounts for secondary crowns made of Wirobond® C+
 - TK1 friction element (MICROTEC*)
 - TK-Soft (Si Tec*)
 - TK-Soft Mini (Si Tec)
- Retention per segment



* This symbol is a commercial designation/registered trademark of a company which is not part of the BEGO company group. User training is required prior to the first design of CAD/CAM double crowns. For further information and training dates, please contact your BEGO sales representative! Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.



Secondary Structures from Hybrid Production

Double crowns and secondary bar constructions with the advantages of the SLM and milling technology

- Hybrid production combines the advantages of the SLM-method (free-form design) with the advantages of the milling technique (precision fitting)
- Free-form design including different retentions and supporting elements
- Almost no follow-up work on milled inside surfaces of secondary construction


Product details

Wirobond® C+ secondary structures from hybrid production

- Hybrid secondary crown
- Secondary attachment
- Attachment mounts for secondary crowns made of Wirobond® C+
 - TK1 friction element (MICROTEC*)
 - TK-Soft (Si Tec*)
 - TK-Soft Mini (Si Tec)
- Retention je Segment Retention per segment
- Hybrid bar secondary structure including pin, hole, and/or bead retentions



Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.

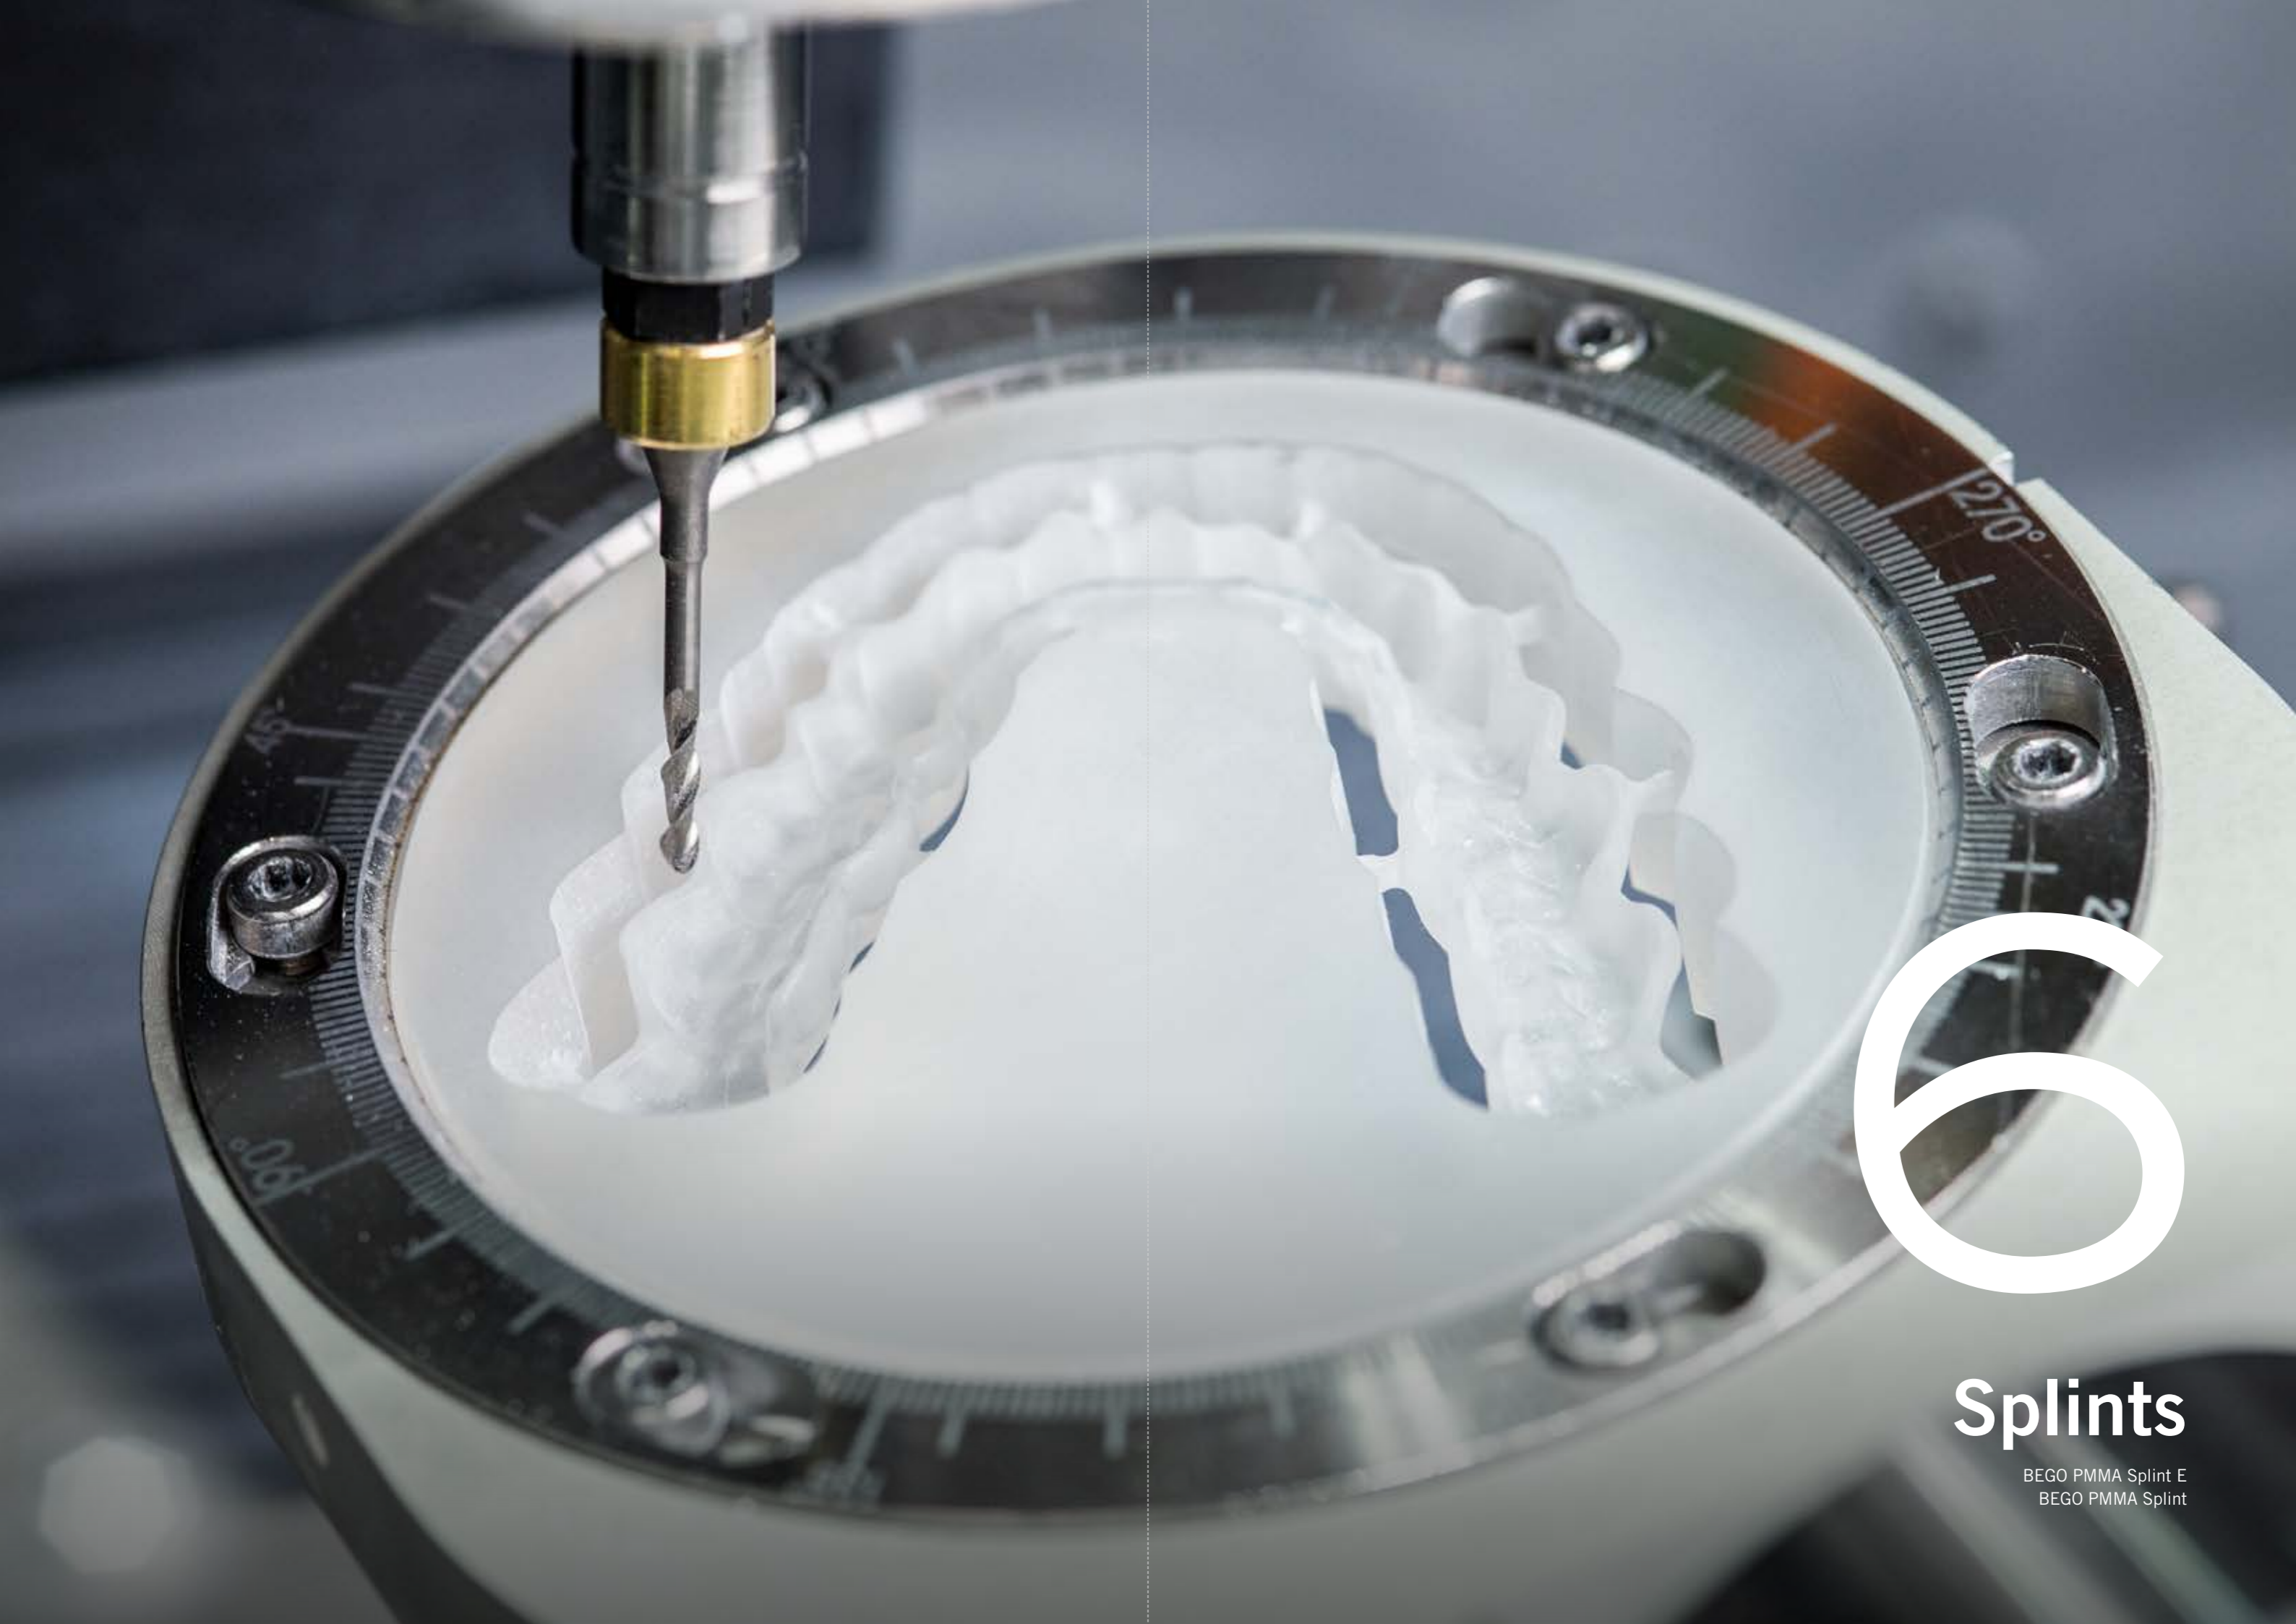

66

Splints

BEGO PMMA Splint E
BEGO PMMA Splint



BEGO PMMA Splint E

Milled thermoplastic occlusal splints

- Very high wearing comfort thanks to thermoplastic flexibility
- Self-adjusting, extremely break-resistant material – adapts to tooth situation
- Low minimum thickness
- Safe and reproducible production process thanks to CAD/CAM technology
- Free from harmful plasticizers such as BPA/Bisphenol A

Product details

Chemical composition


| | |
|---|--------|
| Poly(m)ethylacrylate and cross-linking copolymers of methacrylic acid | > 90 % |
| 1.2-cyclohexane dicarboxylic acid diisononyl ester | < 10 % |

Material data

| | |
|---------------------------|--------------------------------------|
| Flexural strength (23 °C) | > 20 MPa |
| Flexural strength (37 °C) | < 20 MPa |
| Density | Approx. 1.1 to 1.2 g/cm ³ |
| Color | Transparent |

Indication

Milled splints made of BEGO PMMA Splint E

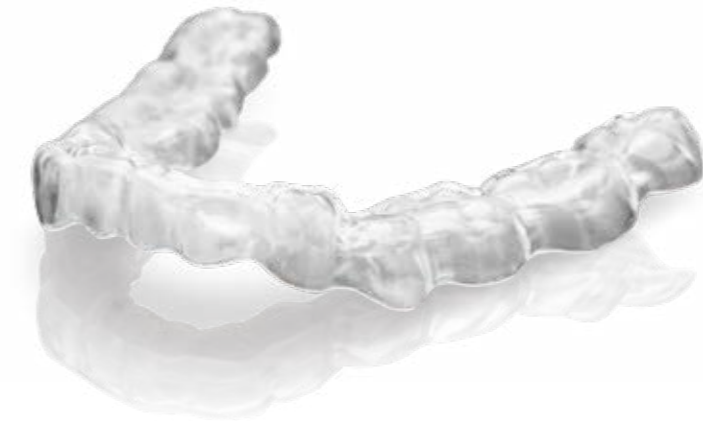

BEGO PMMA Splint

Milled occlusal splints

- Highly cross linked, filler-, fiber- and shrinkage-free PMMA with a low residual monomer content
- Outstanding fit
- Minimal post processing and polishing efforts
- Extension with ordinary PMMA-synthetic material
- Safe and reproducible production process thanks to CAD/CAM technology
- Free from harmful plasticizers such as BPA/Bisphenol A

Product details

Chemical composition

| | |
|--------------------------------------|--------|
| Polymethyl methacrylate | > 98 % |
| Methyl methacrylate | < 1 % |
| Dibenzoyl peroxide; benzoyl peroxide | < 1 % |

Material data

| | |
|-------------------|------------------------|
| Flexural strength | > 91.5 MPa |
| Flexural modulus | 2,773 MPa |
| Density | 1.19 g/cm ³ |
| Color | Transparent |

Indication

Milled splints made of BEGO PMMA Splint

Detailed product information:



from Q3/2023
also available in
grey and light
beige!



Model Production

Digital model production using scan LED technology (SLT)

- Attractive look combined with optimal manufacturing precision and detail accuracy
- Particularly good feel
- Optimal processability

Product details

Models

- Full arch model, beige (upper + lower jaw)
- Quarter model, beige (upper + lower jaw)
- Removable dies, beige
- nt-trading* DIM Analog sleeve
- Gingiva mask, segment
- Gingiva mask, quarter
- Gingiva mask, full arch
- Orthodontic model, upper jaw
- Orthodontic model, lower jaw



Models

Model Production

Detailed product information:



Orthodontic Appliances

SLM-produced orthodontic auxiliaries

- Stress-free frames with outstanding accuracy of fit
- Biocompatible, nickel- and beryllium-free – no cytotoxic or allergic potential
- Homogeneous and dense structure with outstanding corrosion properties
- Supplied already sand-blasted – only minimal finishing required in the lab
- Time and cost savings

Product details

KFO-Apparaturen aus Wirobond® C+

Connecting element

Retainer (fixed or removable)

Band elements for Herbst appliances or palatal expansion

Orthodontic Appliances

Orthodontic Appliances

Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.



Service

Order Options
BEGO CAD/CAM Tracking App
BEGO Further Education
General Information



Order Options

Your order options for CAD/CAM restorations from BEGO

Order options for BEGO CAD/CAM restorations

| | Scan | Design | Production |
|--|-----------------|-----------------|------------|
| 1a 1b Transmission of wax-up data | Your laboratory | Your laboratory | BEGO |
| 2 Transmission of model scan data | Your laboratory | BEGO | BEGO |
| 3 Shipment of models | BEGO | BEGO | BEGO |

For more information, please visit www.bego.com.

1 Transmission of wax-up data

a) Data transmission from the BEGO system

With the BEGO System you have got the possibility to transmit your data from the design software. This allows you to send your designed restorations from your system to our production centre conveniently with just one click of the mouse.

b) Data transmission in STL format via FileGenerator or the order portal

If you work with a scanner which delivers STL data, you can use the BEGO FileGenerator, which is available to download on our homepage, to transmit the data. For more information, please visit www.bego-medical.com/de/orderportal/.

2 Transmission of model scan data

It is also possible to transmit model scan data to our Scan and Design Centre from the BEGO System – without any investment costs for design software. Our expert team will design the restoration for you. Following consultation with you and your approval, BEGO then produces the restorations.

3 Shipment of models

After logging in to our Scan and Design Centre's user-friendly portal, in which you complete the job form, you can send us your model or have our courier service pick it up from your laboratory. We scan your model and design the required restorations based on your specifications. Before commencing production, we give you another chance to check and approve the design.



BEGO CAD / CAM Tracking App

Real time production status

All customers can follow the current production status of their orders at BEGO Medical in real time, whether crown, bridge, partial denture frameworks or implant prosthetics. The app operates as a virtual window into the high-tech production center of BEGO Medical and can easily be downloaded for free from the Google Play Store or from the App Store by Apple onto the mobile terminal device.

After registering with your BEGO customer number and password, users are able to check whether their orders have been received by BEGO, are in data preparation or production, have been produced or already sent to the customer. Additionally, the app provides the opportunity to track the delivery status of the courier service provider.



Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.

* This symbol is a commercial designation/registered trademark of a company which is not part of the BEGO company group



BEGO Further Education

CAD/CAM par excellence – BEGO CAD/CAM courses for a successful future!

The digitalization of dental processes has resulted in fundamental changes to the dental working environment and demands ever more rapid adaptation to new technologies.

Whether you are a newcomer or an old hand, you can benefit from the know-how of our experienced CAD/CAM specialists and gain an insight into the wide spectrum of new possibilities which this technology offers in terms of materials and production processes.

Within the framework of the various courses you can train in scanning, virtual modeling and construction, amongst others.

We have set up fully equipped workstations and training facilities in Bremen and at other regional laboratory bases. Step into the future of customized prosthetics with BEGO Medical!

More information on our entire course program can be found at www.bego.com.



General Information

Good to know

General information

User Support (for technical enquiries)

| | |
|----------------------|-------------------|
| Service hours | |
| Mon.–Thurs. | 8:00 am – 6:00 pm |
| Fri. | 8:00 am – 5:00 pm |

| | |
|----------------|------------------|
| Contact | |
| Telephone | +49 421 2028-200 |
| E-Mail | cadcam@bego.com |

Contact and service (ordering service, invoicing queries)

| | |
|----------------------|-------------------|
| Service hours | |
| Mon.–Thurs. | 8:00 am – 5:00 pm |
| Fri. | 8:00 am – 4:00 pm |

| | |
|----------------|--|
| Contact | |
| Telephone | North Europe +49 421 2028-340 West Europe +49 421 2028-223 South Europe +49 421 2028-249 East Europe +49 421 2028-232 |
| Fax | 0800 23 46 46 5 |
| E-Mail | order.lab@bego.com |

Delivery periods following transmission of data (when order received by 2 p.m.)*

| | |
|--|------------|
| Customized one-piece abutments | 2 workdays |
| Screw-retained bridges and bar restorations made of Wirobond® and BEGO Titan | 4 workdays |
| Crowns and bridges | 2 workdays |
| Milled occlusal splint | 2 workdays |
| Models (if the order is received by 2 p.m.) | 4 workdays |
| SLM partial denture | 2 workdays |

Returns

If you are not satisfied with the goods you receive, please return them to the following address with a completed complaints form**:

BEGO Medical GmbH
User Support
Wilhelm-Herbst-Str. 1
28359 Bremen, Germany



BEGO

CUSTOMER SERVICE CENTER

Great service is done by great people, and that's what BEGO is all about. More than 40 specialists at the Customer Service Center at our headquarters in Bremen, Germany, will be happy to take care of your needs. From product information, order acceptance and application advice to help in case of technical challenges, we are glad to be at your service!

Orders/Inquiries

Implantology:

☎ +49 421 2028-240
✉ order.imp@bego.com

Lab Material & Equipment:

☎ +49 421 2028-220
✉ order.lab@bego.com

Spare Parts (Equipment):

☎ +49 421 2028-270
✉ hardware@bego.com

Digital Services

Guided Surgery:

☎ +49 421 2028-230
✉ guide@bego.com

Scan- and Design Center:

☎ +49 421 2028-210
✉ design@bego.com

CAD/CAM Advice:

☎ +49 421 2028-200
✉ cadcam@bego.com

3D Printing:

☎ +49 421 2028-280
✉ 3d@bego.com

Product & Application Advice

Implantology:

☎ +49 421 2028-260
✉ implantology@bego.com

CAD/CAM Advice:

☎ +49 421 2028-200
✉ cadcam@bego.com

Equipment:

☎ +49 421 2028-270
✉ hardware@bego.com

3D Printing & Lab Material:

☎ +49 421 2028-280
✉ material.lab@bego.com



Here, you find more information
about our services:
<https://www.bego.com/service/>



REALLY. GOOD. INFORMED.



Always up to date with our BEGO News!
Subscribe to our free BEGO Newsletter. We will keep you informed about our latest product information, useful tutorials, tips & tricks, interesting training courses and events as well as special offers and promotions.

Curious?

Sign up for our newsletter here:
www.bego.com/newsletter

Simply scan the QR Codes and be always up to date in terms of CAD/CAM implant prosthetics!



Interface Overview



Overview Prosthetic Components
and CADPositioner



www.bego.com

BEGO Medical GmbH

Wilhelm-Herbst-Str. 1 · 28359 Bremen, Germany
Tel. +49 421 2028-200 · Fax+49 421 2028-174
E-Mail cadcam@bego.com · www.bego.com

BEGO Scan- und Designcenter Nord

Wilhelm-Herbst-Str. 1 · 28359 Bremen, Germany
Tel. +49 421 2028-210
E-Mail design@bego.com · www.bego.com

BEGO Scan- und Designcenter Süd

Max-Planck-Str. 7 · 85716 Unterschleißheim, Germany
Tel. +49 89 200703 99

Always want to have a look at all BEGO news?

Sign up for our newsletter here: www.bego.com/newsletter



Errors and changes excepted. Our deliveries of products and services are governed by our Standard Terms of Business (STB), which are available at any time at www.bego.com and will be sent upon request. Please note that not all our products and services are available throughout the world, depending on authorities' approvals. For more information, please consult your local BEGO representative.